

FEATURES

- ▶ Fully Encapsulated Plastic Case for PCB Mounting
- ▶ Universal Input 85~264VAC, 47~440Hz
- ▶ Protection Class II as per IEC/EN 60536
- ▶ I/O Isolation 3000VAC with Reinforced Insulation
- ▶ Operating Ambient Temp. Range -25°C to +70°C
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ Designed-in EMI Emission meets EN 55011/32 Class B & FCC Level B
- ▶ Designed-in EMC Immunity meets EN61000-4-2,3,4,5,6,8,11
- ▶ Eco Design, Compliant to Energy Star Specification and ErP Directive 2009/125/EC
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval & CE Marking


PRODUCT OVERVIEW

The MINMAX ADF-07 series is a new range of fully encapsulated AC/DC power supply modules. They are designed for direct PCB mounting with solder pins. The product features EMI-filter to EN 55011/32, class B and EMS compliance to the EN 61000-4 standard. Universal input voltage 85-264VAC and International safety approvals qualifies these power modules for applications in products with worldwide markets.

The ADF-07 series provide a cost effective solution for many space critical applications in commercial and industrial electronic equipment.

Model Selection Guide

| Model Number | Output Voltage VDC | Output Current Max. mA | Input Current | Max. capacitive Load μF | Efficiency (typ.) @Max. Load % |
|--------------|-----------------------|------------------------------|--|-------------------------------|---|
| | | | 115VAC, 60Hz @Max. Load mA(typ.) | | |
| ADF-07S03 | 3.3 | 1400 | 96 | 2200 | 70 |
| ADF-07S05 | 5 | 1400 | 139 | 2200 | 73 |
| ADF-07S12 | 12 | 583 | 130 | 1000 | 78 |
| ADF-07S15 | 15 | 466 | 130 | 1000 | 78 |
| ADF-07S24 | 24 | 291 | 130 | 680 | 78 |

Input Specifications

| Parameter | Conditions / Model | | Min. | Typ. | Max. | Unit |
|-----------------------------|--------------------|--------------------|-----------------------|------|------|------|
| Input Voltage Range | All Models | | 85 | --- | 264 | VAC |
| Input Frequency Range | | | 47 | --- | 440 | Hz |
| Input Voltage Range | | | 120 | --- | 370 | VDC |
| No-Load Power Consumption | | | --- | --- | 0.3 | W |
| Inrush Current | 115VAC | Cold Start at 25°C | --- | --- | 10 | A |
| | 230VAC | | --- | --- | 20 | A |
| External Fuse (Recommended) | All Models | | 1.5A Slow – Blow Type | | | |

Output Specifications

| Parameter | Conditions / Model | | Min. | Typ. | Max. | Unit |
|---------------------------------|---|----------------------------|------|-------|-------|------------|
| Output Voltage Setting Accuracy | | | --- | ±1.0 | ±2.0 | %Vnom. |
| Line Regulation | Vin=Min. to Max. @Full Load | | --- | ±0.5 | ±1.0 | % |
| Load Regulation | Io=Min. to Max. | | --- | ±0.5 | ±1.0 | % |
| Ripple & Noise | 0-20 MHz Bandwidth | 3.3 & 5.0VDC Output Models | --- | 1.5 | 1.8 | %Vpp of Vo |
| | | Other Output Models | --- | 0.8 | 1.0 | %Vpp of Vo |
| Minimum Load | | | --- | 10 | --- | %Inom. |
| Over Voltage Protection | Zener diode clamp | | --- | 120 | --- | % of Vo |
| Temperature Coefficient | | | --- | ±0.01 | ±0.02 | %/°C |
| Overshoot | | | --- | --- | 5 | % Vout |
| Over Load Protection | Foldback, auto-recovery | | 105 | --- | --- | %Inom. |
| | (long term overload condition may cause damage) | | | | | |
| Short Circuit Protection | Hiccup mode, Automatic Recovery | | | | | |

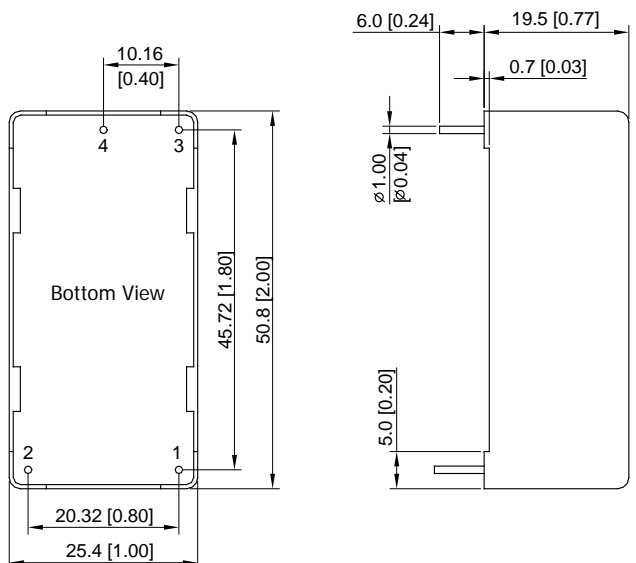
| General Specifications | | | | | |
|--------------------------|--|---------|------|------|--------|
| Parameter | Conditions | Min. | Typ. | Max. | Unit |
| I/O Isolation Voltage | Input to Output, 60 Seconds | 3000 | --- | --- | VACrms |
| I/O Isolation Resistance | 500 VDC | 100 | --- | --- | MΩ |
| Switching Frequency | | --- | 100 | --- | KHz |
| Hold-up Time | | --- | 20 | --- | ms |
| MTBF (calculated) | MIL-HDBK-217F@25°C, Ground Benign | 330,000 | | | Hours |
| Protection Class II | According IEC/EN 60536 | | | | |
| Safety Approvals | UL/cUL 60950-1 recognition(UL certificate) , IEC/EN 60950-1(CB-report) | | | | |

| Environmental Specifications | | | | | |
|---|--|-------|------|------|----------|
| Parameter | Conditions | Min. | Typ. | Max. | Unit |
| Operating Ambient Temperature Range | Natural Convection | -25 | --- | +70 | °C |
| Storage Temperature Range | | -40 | --- | +85 | °C |
| Power Derating | +50°C to +70°C | 0.263 | | | W / °C |
| Thermal Shutdown | Shutdown, Internal IC Junction Temperature | --- | 142 | --- | °C |
| | Automatic Recovery, Internal IC Junction Temperature | --- | 67 | --- | °C |
| Humidity (non condensing) | | --- | --- | 95 | % rel. H |
| Cooling | Natural Convection | | | | |
| Lead Temperature (1.5mm from case for 10Sec.) | | --- | --- | 260 | °C |

| EMC Specifications | | | |
|--------------------|--------------------------|---------------------------------------|-------------|
| Parameter | Standards & Level | | Performance |
| EMI | Conduction and Radiation | EN 55014-1, EN 55032, FCC part 15 | Class B |
| | EN 55014-2, EN 55024 | | |
| EMS | ESD | EN 61000-4-2 Air ± 8kV, Contact ± 4kV | B |
| | Radiated immunity | EN 61000-4-3 10V/m | A |
| | Fast transient | EN 61000-4-4 ±2kV | B |
| | Surge | EN 61000-4-5 ±1kV | B |
| | Conducted immunity | EN 61000-4-6 10Vrms | B |
| | PFMF | EN 61000-4-8 30A/m | A |
| | Dips | EN 61000-4-11 30% 10ms | B |
| | Interruptions | EN 61000-4-11 >95% 5000ms | C |

| Notes | |
|-------|---|
| 1 | Specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted. |
| 2 | These power modules require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage the power supplies however they may not meet all listed specifications. |
| 3 | We recommend to protect the converter by a slow blow fuse in the input supply line. |
| 4 | Other input and output voltage may be available, please contact factory. |
| 5 | Specifications are subject to change without notice |

Package Specifications

| Mechanical Dimensions | | Pin Connections | | | | | | | | | | |
|---|--------------------|--|-----|----------|---|--------------------|---|-----------------|---|-------|---|-------|
|  <p style="text-align: center;">Bottom View</p> | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Pin</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td>AC(N) – AC Neutral</td> </tr> <tr> <td style="text-align: center;">2</td> <td>AC(L) – AC Line</td> </tr> <tr> <td style="text-align: center;">3</td> <td>+Vout</td> </tr> <tr> <td style="text-align: center;">4</td> <td>-Vout</td> </tr> </tbody> </table> | Pin | Function | 1 | AC(N) – AC Neutral | 2 | AC(L) – AC Line | 3 | +Vout | 4 | -Vout |
| Pin | Function | | | | | | | | | | | |
| 1 | AC(N) – AC Neutral | | | | | | | | | | | |
| 2 | AC(L) – AC Line | | | | | | | | | | | |
| 3 | +Vout | | | | | | | | | | | |
| 4 | -Vout | | | | | | | | | | | |
| <p>▶ All dimensions in mm (inches)</p> <p>▶ Tolerance: ±0.5 (±0.02)</p> <p>▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04±0.004)</p> | | | | | | | | | | | | |

Physical Characteristics

| | |
|---------------|--|
| Case Size | : 50.8x25.4x19.5mm (2.00x1.00x0.77 Inches) |
| Case Material | : Plastic resin (flammability to UL 94V-0 rated) |
| Weight | : 44g |