

FEATURES

- ▶ **Ultra-compact Dimensions:**
52.4x27.2x23.5 mm (2.1x1.1x0.9")
- ▶ **Fully encapsulated Module with Solder Pins for PCB Mounting**
- ▶ **Universal Input 85-264 VAC, 47-440 Hz**
- ▶ **Eco Design, compliant to Energy Star specification and ErP Directive 2009/125/EC**
- ▶ **Protection Class II**
- ▶ **Safety Approval to cUL/UL/IEC/EN 60950-1**
- ▶ **Over Load and Over Voltage Protection**
- ▶ **3 Year Product Warranty**



PRODUCT OVERVIEW

The MINMAX AGF-10 series is a new range of fully encapsulated AC/DC power supply modules. They are designed for direct PCB mounting with solder pins. The product features EMI-filter to EN55022, class B and EMS compliance to the EN 61000-4 standard. Universal input voltage 85-264VAC and International safety approvals qualifies these power modules for applications in products with worldwide markets.

The AGF-10 series provide a cost effective solution for many space critical applications in commercial and industrial electronic equipment.

Model Selection Guide

Model Number	Output Voltage	Output Current	Input Current		Max. capacitive Load	Efficiency (typ.)
			115VAC, 60Hz			
			Max.	@No Load		
	VDC	mA	@Max. Load mA(typ.)	@No Load mA(typ.)	uF	@Max. Load %
AGF-10S03	3.3	2500	171	15	2200	70
AGF-10S05	5	2000	201	15	2200	72
AGF-10S12	12	833	191	15	1000	76
AGF-10S15	15	667	193	15	1000	75
AGF-10S24	24	417	201	15	680	72

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	440	Hz
Input Voltage Range		120	---	370	VDC
No-Load Power Consumption		---	---	0.5	W
Inrush Current (Cold Start at 25°C)		115VAC	---	---	15
	230VAC	---	---	30	A

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	±1.0	±2.0	%
Line Regulation	V _{in} =Min. to Max.	---	±0.5	±1.0	%
Load Regulation	I _{out} =Min. to Max.	---	±0.5	±1.0	%
Ripple & Noise (20MHz)	3.3 & 5.0VDC Output Models	---	1.5	1.8	%V _{PP} of V _o
	Other Output Models	---	0.8	1.0	%V _{PP} of V _o
Minimum Load		---	10	---	%I _{nom} .
Over Voltage Protection	Zener diode clamp	---	120	---	% of V _o
Temperature Coefficient		---	±0.01	±0.02	%/°C
Overshoot		---	---	5	% V _{out}
Current Limitation	Foldback, auto-recovery (long term overload condition may cause damage)	105	---	---	%I _{nom} .
Short Circuit Protection	Hiccup mode, indefinite (automatic recovery)				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Input to Output, 60 Seconds	3000	---	---	VACrms
I/O Isolation Resistance	500 VDC	100	---	---	MΩ
Switching Frequency		---	125	---	KHz
Hold-up Time		---	20	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	300,000	----	----	Hours
EMC Emission	Conducted and radiated	EN 55011, class B, EN 55022, class B, FCC part 15, class B			
EMC Immunity according EN61000-6-1	Standard	Specification Requirement			Performance Criteria
	EN61000-4-2	Air ±8KV Cont. ±4KV			B
	EN61000-4-3	80~1000MHz, 10V/m 80% AM, 1KHz modulation			A
	EN61000-4-4	AC port ±2KV DC, SL, TL ±2KV not less than 1 min.			B
	EN61000-4-5	1.2/50uS(8/20uS) AC dif. ±1KV DC ±0.5KV			B
	EN61000-4-6	0.15~80MHz, 10Vrms (functional earth ports included) 80% AM, 1KHz modulation			B
	EN61000-4-8	50Hz/60Hz, 30A/m			A
	EN61000-4-11	30%, 10ms 60%, 100ms, 95%, 5000ms			B C
Protection Class II		According IEC/EN 60536			
Safety Approvals		cUL/UL 60950-1, IEC/EN 60950-1			

Input Fuse

All Models	
External Fuse (Recommended)	1.5A Slow – Blow Type

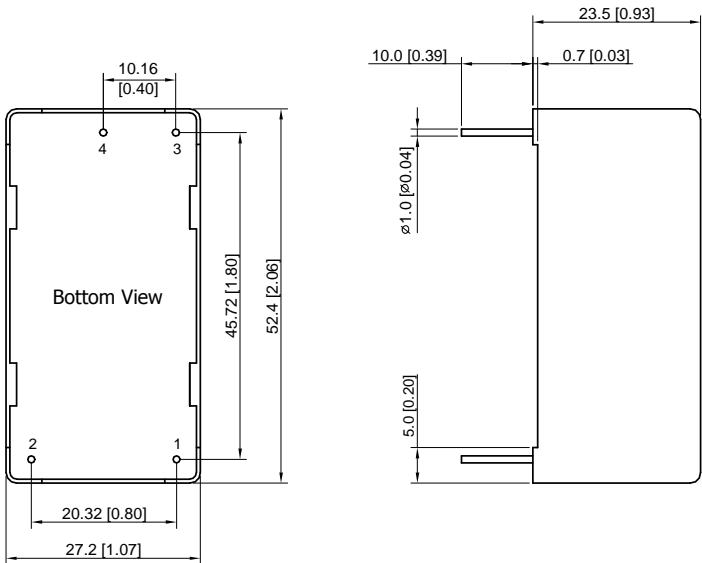
Environmental Specifications

Parameter	Conditions	
Temperature Range (operational)	Ambient	-25°C +70°C
Power Derating	+50°C to +70°C	0.375W / °C
Storage Temperature Range		-40 +85
Over Temperature Protection	at 90°C (automatic recovery at 67°C)	
Cooling	Free-Air convection	
Humidity (non condensing)		--- 95 % rel. H

Notes

- All specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
- Ripple & Noise measurement bandwidth is 0~20 MHz
- These power modules require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage the power supplies however they may not meet all listed specifications.
- All AC/DC modules should be externally fused at the front end for protection.
- Other input and output voltage may be available, please contact factory.
- Specifications subject to change without notice

Package Specifications

Mechanical Dimensions		Pin Connections	
		Pin	Function
		1	AC(N) – AC Neutral
		2	AC(L) – AC Line
		3	+Vout
		4	-Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ±0.5 (±0.02)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04±0.004)

Physical Characteristics

Case Size	: 52.4x27.2x23.5mm (2.06x1.07x0.93 Inches)
Case Material	: Plastic resin + Fiberglass (flammability to UL 94V-0 rated)
Weight	: 54g