

FEATURES

- ▶ Industrial Standard SIP-4 Package
- ▶ I/O Isolation 1000 VDC
- ▶ Operating Ambient Temp. Range -40°C to +85°C


PRODUCT OVERVIEW

The MINMAX MBU100 series is a range of 1W DC/DC converters in a miniature SIP Package featuring I/O-isolation of 1000VDC.

A high efficiency allows an operating temperature range of -40°C to +85°C.

These converters offer an economical solution for many space critical applications where a voltage has to be isolated i.e for noise reduction, ground loop elimination, digital interfaces or for board level power distribution.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Load Regulation % (max.)	Max. capacitive Load µF	Efficiency (typ.) %
			Max.	Min.	@Max. Load mA(typ.)	@No Load mA(typ.)			
			mA	mA					
MBU135	3.3	3.3	260	6	351	35	14	33	74
MBU131	(2.97 ~ 3.63)	5	200	4	394		14		77
MBU105	5 (4.5 ~ 5.5)	3.3	260	6	238	30	11	33	72
MBU101		5	200	4	290		11		69
MBU102		9	110	2	260		8		76
MBU103		12	84	1.5	262		7		77
MBU104		15	67	1	258		6		78
MBU111	12 (10.8 ~ 13.2)	5	200	4	117	13	9	33	71
MBU112		9	110	2	107		5		77
MBU113		12	84	1.5	106		5		79
MBU114		15	67	1	105		4		80
MBU121	24 (21.6 ~ 26.4)	5	200	4	60	7	8	33	70
MBU122		9	110	2	54		5		76
MBU123		12	84	1.5	53		4		79
MBU124		15	67	1	53		4		79

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	3.3V Input Models	2.97	3.3	3.63	VDC
	5V Input Models	4.5	5	5.5	
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Input Surge Voltage (1 sec. max.)	3.3V Input Models	-0.7	---	6	VDC
	5V Input Models	-0.7	---	9	
	12V Input Models	-0.7	---	18	
	24V Input Models	-0.7	---	30	
Reverse Polarity Input Current	All Models	---	---	0.3	A
Input Filter		Internal Capacitor			

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	±1.0	±3.0	%Vnom.
Line Regulation	For Vin Change of 1%	---	±1.2	±1.5	%
Load Regulation	Io=20% to 100%	See Model Selection Guide			
Ripple & Noise	0-20 MHz Bandwidth	---	100	150	mV _{P-P}
Temperature Coefficient		---	±0.01	±0.02	%/°C
Short Circuit Protection	0.5 Second Max., Automatic Recovery				


General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1000	---	---	VDC
	1 Seconds	1200	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	60	100	pF
Switching Frequency		50	90	110	KHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,000,000			Hours

Environmental Specifications


Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+85	°C
Case Temperature		---	+90	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Natural Convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

Power Derating Curve

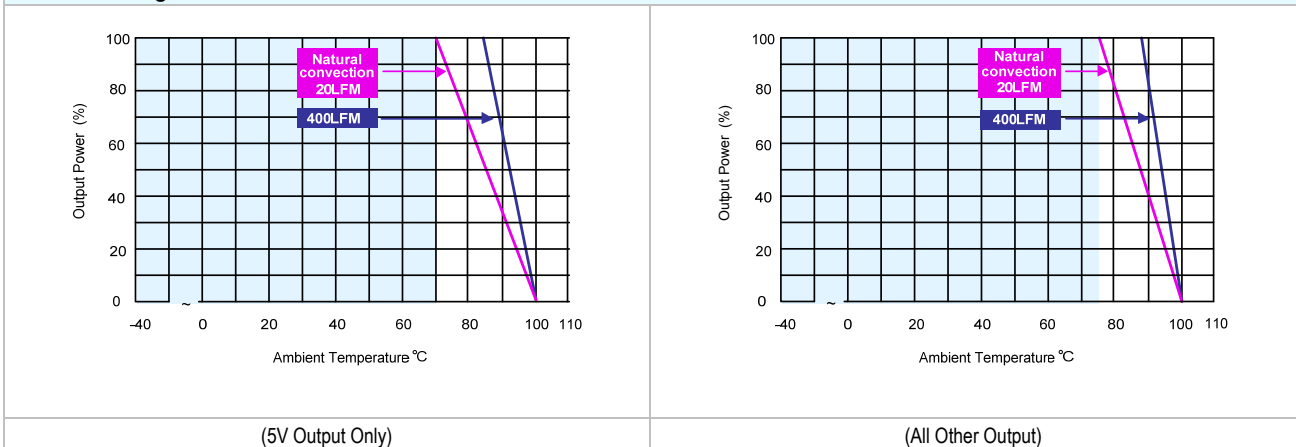

Notes


- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 6 Specifications are subject to change without notice.

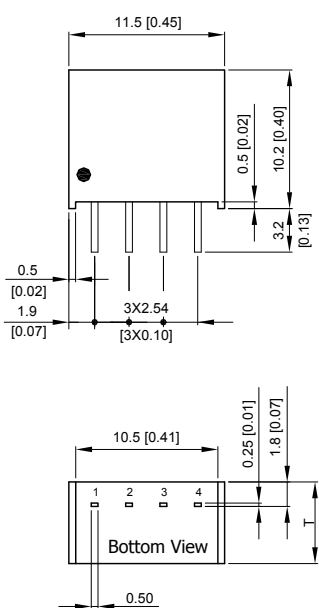Package Specifications											
<div style="background-color: #e0e0e0; padding: 2px;">Mechanical Dimensions</div>  <p>The drawing shows two views of the component. The top view indicates a width of 11.5 mm [0.45] and a height of 10.2 mm [0.40]. The bottom view shows a width of 10.5 mm [0.41] and a height of 1.8 mm [0.07]. Pin dimensions include a pitch of 2.54 mm [0.10] and a pin width of 0.50 mm [0.02].</p>	<div style="background-color: #e0e0e0; padding: 2px;">Pin Connections</div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th style="width: 15%;">Pin</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-Vin</td> </tr> <tr> <td>2</td> <td>+Vin</td> </tr> <tr> <td>3</td> <td>-Vout</td> </tr> <tr> <td>4</td> <td>+Vout</td> </tr> </tbody> </table> <p style="margin-top: 20px;">T: 6.1mm(0.24 inch) for 3.3V&5V&12V Input Models T: 7.1mm(0.28 inch) for 24V Input Models</p> <ul style="list-style-type: none"> ▶ All dimensions in mm (inches) ▶ Tolerance: X.X±0.25 (X.XX±0.01) X.XX±0.13 (X.XXX±0.005) ▶ Pins ±0.05(±0.002) 	Pin	Function	1	-Vin	2	+Vin	3	-Vout	4	+Vout
Pin	Function										
1	-Vin										
2	+Vin										
3	-Vout										
4	+Vout										
<div style="background-color: #e0f2f1; padding: 2px;">Physical Characteristics</div> <p>Case Size(3.3V, 5V, 12V Input) : 11.5x6.1x10.2mm (0.45x0.24x0.40 inches)</p> <p>Case Size(24V Input) : 11.5x7.1x10.2mm (0.45x0.28x0.40 inches)</p> <hr/> <p>Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)</p> <hr/> <p>Pin Material : Alloy 42</p> <hr/> <p>Weight(3.3V, 5V, 12V Input) : 1.3g</p> <p>Weight(24V Input) : 1.7g</p>											

Test Setup

Peak-to-Peak Output Noise Measurement Test

Use a Cout 0.33μF ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

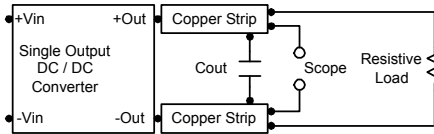


Technical Notes

Maximum Capacitive Load

The MBU100 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 33μF maximum capacitive load for devices. The maximum capacitance can be found in the data sheet.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is comended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 KHz) capacitor of a 2.2μF for the 3.3V, 5V input devices, a 1.0μF for the 12V input devices and a 0.47μF for the 24V devices.

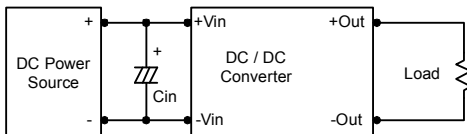

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 1μF capacitors at the output.

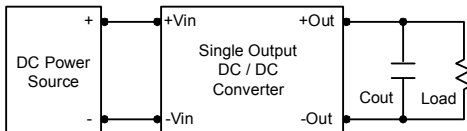

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 90°C. The derating curves are determined from measurements obtained in a test setup.

