

FEATURES

- ▶ Industrial SMD Package
- ▶ Fully Regulated Output Voltage
- ▶ Low Ripple & Noise
- ▶ Excellent Efficiency up to 97%
- ▶ Operating Ambient Temp. Range -40°C to +90°C
- ▶ No Min. Load Requirement
- ▶ Over Temp. and Short Circuit Protection
- ▶ Remote ON/OFF Control, Output Voltage Trim
- ▶ Qualified for Lead-free Reflow Solder Process
According to IPC/JEDEC J-STD-020D.1
- ▶ Tape & Reel Package Available


PRODUCT OVERVIEW

The MINMAX M78SAR-0.5 series is a new range of switching regulators designed as a drop-in replacement for old LM78xx linear regulators with low efficiency. The very high efficiency of these step-down converters allow an operating temperature up to 80°C at full-load without need of any heatsink. The high efficiency and low stand-by power consumption of these switching regulators offer the designer a new, cost-efficient solution for many applications.

Model Selection Guide

Model Number	Input Voltage Range(s) VDC	Output Voltage		Output Current Max. mA	Max. capacitive Load µF	Efficiency (typ.) @Min. Vin	Efficiency (typ.) @Max. Vin
		Normal VDC	Adjust Range VDC			%	%
	M78SAR015-0.5	4.75 ~ 32	1.5	1.4~2.5	500	220	73
M78SAR018-0.5	1.8		1.5~3	500	220	82	71
M78SAR025-0.5	2.5		1.5~3	500	220	87	77
M78SAR033-0.5	3.3		3~5.5	500	220	91	81
M78SAR05-0.5	6.5 ~ 32	5	3~8	500	220	94	86
M78SAR065-0.5	8 ~ 32	6.5	3.3~11	500	220	95	88
M78SAR09-0.5	11 ~ 32	9	4.5~12.6	500	220	96	92
M78SAR12-0.5	15 ~ 32	12	4.5~13.5	500	220	97	94
M78SAR15-0.5	18 ~ 32	15	4.5~15.5	500	220	97	95

Input Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)		-0.3	---	34	VDC
Internal Filter Type		Capacitor			
Input Filter	All Models	Internal Capacitor			
Short Circuit Input Power		---	---	1.5	W
Input Current	@No Load	---	5	---	mA

Remote On/Off Control


Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On		Open or 2.4V<Vr<5V			
Converter Off		GND or 0<Vr<1.6V			
Standby Input Current	Nominal Vin	---	---	35	µA

Output Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy		---	±2.0	±3.0	%Vnom.	
Line Regulation	Vin=Min. to Max. @Full Load	1.5V to 6.5V	---	±0.2	±0.4	%
		9V to 15V	---	±0.1	±0.2	%
Load Regulation	Io=10% to 100%	1.5V to 6.5V	---	±0.4	±0.6	%
		9V to 15V	---	±0.25	±0.4	%
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20MHz Bandwidth	1.5V to 6.5V	---	---	30	mV _{P-P}
		9V to 15V	---	---	40	mV _{P-P}
Transient Recovery Time	50% Load Step Change	---	100	---	µsec	
Transient Response Deviation		---	±2	---	%	
Temperature Coefficient		---	---	±0.015	%/ ^o C	
Short Circuit Protection	Continuous, Automatic Recovery					

General Specifications							
Parameter	Conditions	Min.	Typ.	Max.	Unit		
I/O Isolation Voltage	none						
Switching Frequency		280	330	380	kHz		
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,000,000				Hours	
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1	Level 2					

EMC Specifications					
Parameter	Standards & Level			Performance	
EMI ₍₄₎	Conduction	EN 55022	With external components		Class A, B
	Radiation		Without external components		
EMS ₍₄₎	ESD	EN 61000-4-2 Air±8kV			A
	Radiated immunity	EN 61000-4-3 3V/m			A
	Fast transient	EN 61000-4-4 ±0.5kV			A
	Conducted immunity	EN 61000-4-6 3Vrms			A
	PFMF	EN 61000-4-8 3A/m			A


Environmental Specifications						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Operating Ambient Temperature Range (See Power Derating Curve)		-40	---	+90	°C	
Case Temperature		---	---	+100	°C	
Storage Temperature		-55	---	+125	°C	
Thermal Shutdown	Internal IC junction	---	160	---	°C	
Humidity (non condensing)		---	---	95	% rel. H	
Lead-free reflow solder process	IPC/JEDEC J-STD-020D.1					


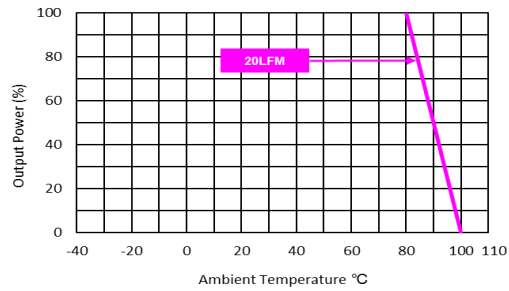
Power Derating Curve**Notes**

- 1 Specifications typical at $T_a=+25^{\circ}\text{C}$, resistive load, nominal input voltage, rated output current unless otherwise noted.
- 2 Other input and output voltage may be available, please contact MINMAX.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
- 5 With a input capacitor $22\mu\text{F}/50\text{V}$ for input voltage $>28\text{VDC}$, the input voltage allows 32VDC , max.
- 6 Specifications are subject to change without notice.

Adjustment Resistor Values

	M78SAR015-0.5		M78SAR018-0.5		M78SAR025-0.5		M78SAR033-0.5		M78SAR05-0.5		M78SAR065-0.5		M78SAR09-0.5		M78SAR12-0.5		M78SAR15-0.5	
Vout(nom.)	1.5VDC		1.8VDC		2.5VDC		3.3VDC		5.0VDC		6.5VDC		9.0VDC		12VDC		15VDC	
Vout(adj)	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2	R1	R2
1.4 (V)	1 KΩ																	
1.5 (V)			3KΩ		200Ω													
1.8 (V)		6.49 KΩ			12KΩ													
2.5 (V)		0.47 KΩ		11.8KΩ														
3.0 (V)				4.64KΩ		44.2KΩ	88.4KΩ		17KΩ									
3.3 (V)									27KΩ		15KΩ							
3.6 (V)								60.4KΩ	42KΩ		21.5KΩ							
3.9 (V)								28KΩ	58KΩ		30.1KΩ							
4.5 (V)								11.3KΩ	180KΩ		56.3KΩ		26KΩ		17KΩ		10.5 KΩ	
4.9 (V)								7.15KΩ	850KΩ		78.7KΩ		36KΩ		24KΩ		15.8 KΩ	
5.0 (V)								6.34KΩ			86KΩ		39KΩ		26KΩ		17.4 KΩ	
5.1 (V)								5.9KΩ		231KΩ	97KΩ		42KΩ		28KΩ		18.7 KΩ	
5.5 (V)								3.9KΩ		56.2KΩ	154KΩ		56KΩ		36KΩ		24.9 KΩ	
6.5 (V)										14KΩ			112KΩ		63KΩ		42.2 KΩ	
8.0 (V)										2.32KΩ		22.6KΩ	400KΩ		125KΩ		78.7 KΩ	
9.0 (V)												9.53KΩ			200KΩ		113 KΩ	
10 (V)												3.92KΩ		54.9KΩ	345KΩ		160 KΩ	
11 (V)												825Ω		16.5KΩ	740KΩ		232 KΩ	
12 (V)														3.6KΩ			340 KΩ	
12.6 (V)														0Ω		180KΩ	464 KΩ	
13.5 (V)																57.6 KΩ	787 KΩ	
15.5 (V)																		300 KΩ

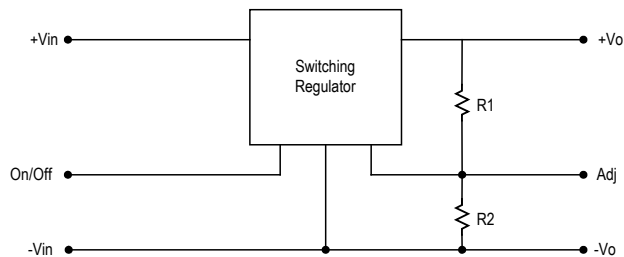

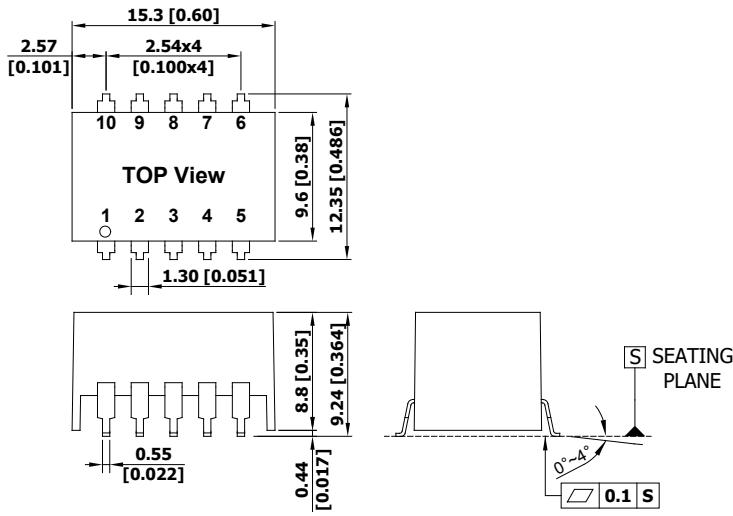Package Specifications
Mechanical Dimensions

Connecting Pin Patterns


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05(±0.002)

Pin Connections

Pin	Function
1	+Vin
2	+Vin
3	GND
4	+Vout
5	+Vout
6	Vadj.
7	GND
8	GND
9	GND
10	Remote On/Off

Physical Characteristics

Case Size : 15.3x9.6x8.8mm (0.60x0.38x0.35 inches)

Case Material : Plastic resin (flammability to UL 94V-0 rated)


Pin Material : Phosphor Bronze

Weight : 1.7g

Test Setup

Peak-to-Peak Output Noise Measurement Test


Use a Cout 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

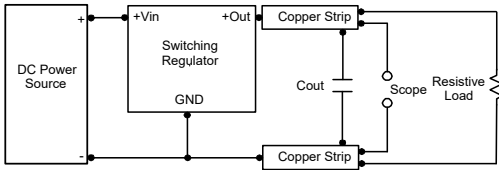

Technical Notes

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.

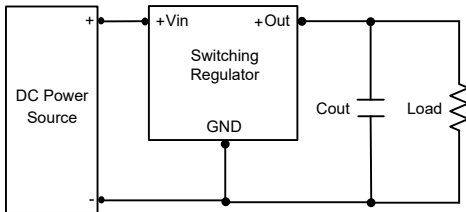

Maximum Capacitive Load

The M78SAR-0.5 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.